



Power M-Series

160 watt, 130 watt, 125 watt, and 115 watt

SUNPOWER®

Walk-On Tough!


Maximum performance –
even under extreme conditions

Appearance and Design:

- Elegant and attractive design
- Extremely thin 3/16" (5mm) with aluminum Dibond backing plate
- Flexible and bendable plate for mounting on curved surfaces (up to 3%)
- Rugged construction allows panel to be walked on
- Pre-drilled cable exit hole permits tidy installation

Excellent performance : Highest quality

- High efficiency ensured by the use of Sunpower® monocrystalline Back-Contact cells with **23%+** efficiency
- Increased voltage output thanks to high cell count
- Powerful low-light performance – High yields even under cloudy and partially shaded conditions
- Especially developed for marine installation in areas of heat/cold, and salt water environments
- Equipped with an UV resistant cable, sea-water proof cable outlet, and mounting holes
- External cell protector with bypass diodes offers protection against cell overheating (Hot-Spots)
- Manufactured exclusively in Germany

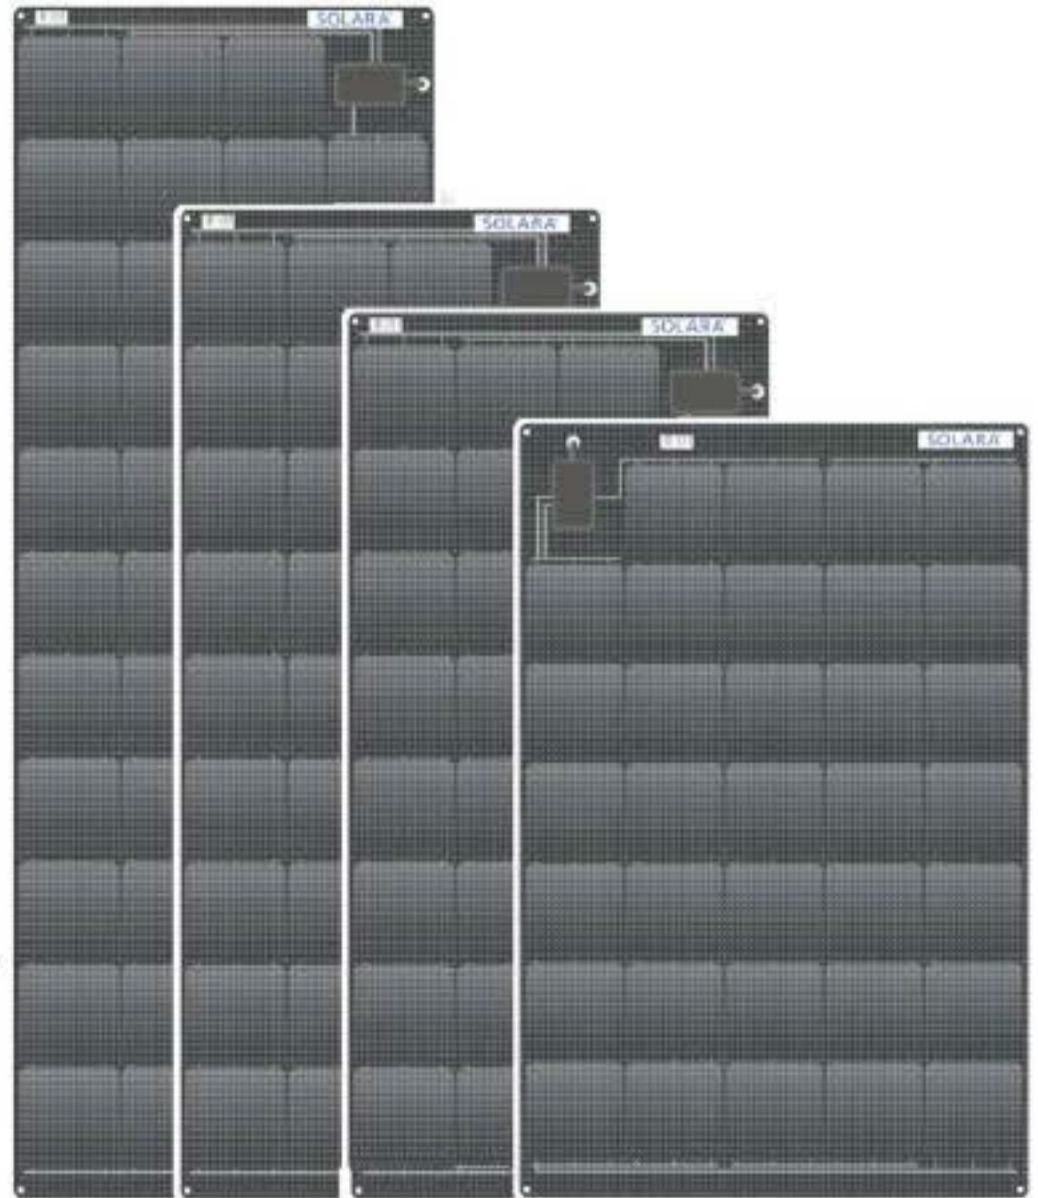

Full 5 Year Product Warranty!



EZ Mount - Mounting Frame Option



Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com

301-352-5738 - Annapolis MD USA

SOLARA Power M-Series

Performance under STC*

Module type	S 515M31 Marine	S 555M34 Marine	S 575M35 Marine	S 705M43 Marine
Estimated daily output in Watt-hours/day (Good solar day, constant full load)	515 W-hrs/day	555 W-hrs/day	575 W-hrs/day	705 W-hrs/day
Nominal power	115 W	125W	130W	160W
Short-circuit current (Isc)	6.40 A	6.40A	6.40 A	6.40 A
Open-circuit voltage (Voc)	22.63 V	24.82 V	25.55 V	31.39 V
Voltage at peak power (Vmpp)	19.22 V	21.08 V	21.70 V	26.66 V
Current at peak power (Impp)	6.04 A	6.04 A	6.04 A	6.04 A
Cell efficiency	23%+	23%+	23%+	23%+

* Under standard testing conditions STC (1,000 W/m², spectrum 1.5, cell temperature 25 °C) Tolerance +/- 5%


Dimensions and weight

Dimensions (LxW)	44.1" x 21.3"	38.9" x 25.9"	49.2" x 21.3"	59.3" x 21.3"
Weight	7.9 lb	9.2 lb	9.7 lb	11.3 lb
Cable length	8.7'	8.7'	8.7'	8.7'

Number of cells 115W - 31, 125W - 34, 130W - 35, 160W - 43

Cell technology High Grade SunPower Back-Contact cells

Cable outlet Robust, sealed and waterproof cable outlet, screwed and potted
(Front standard - Rear optional)

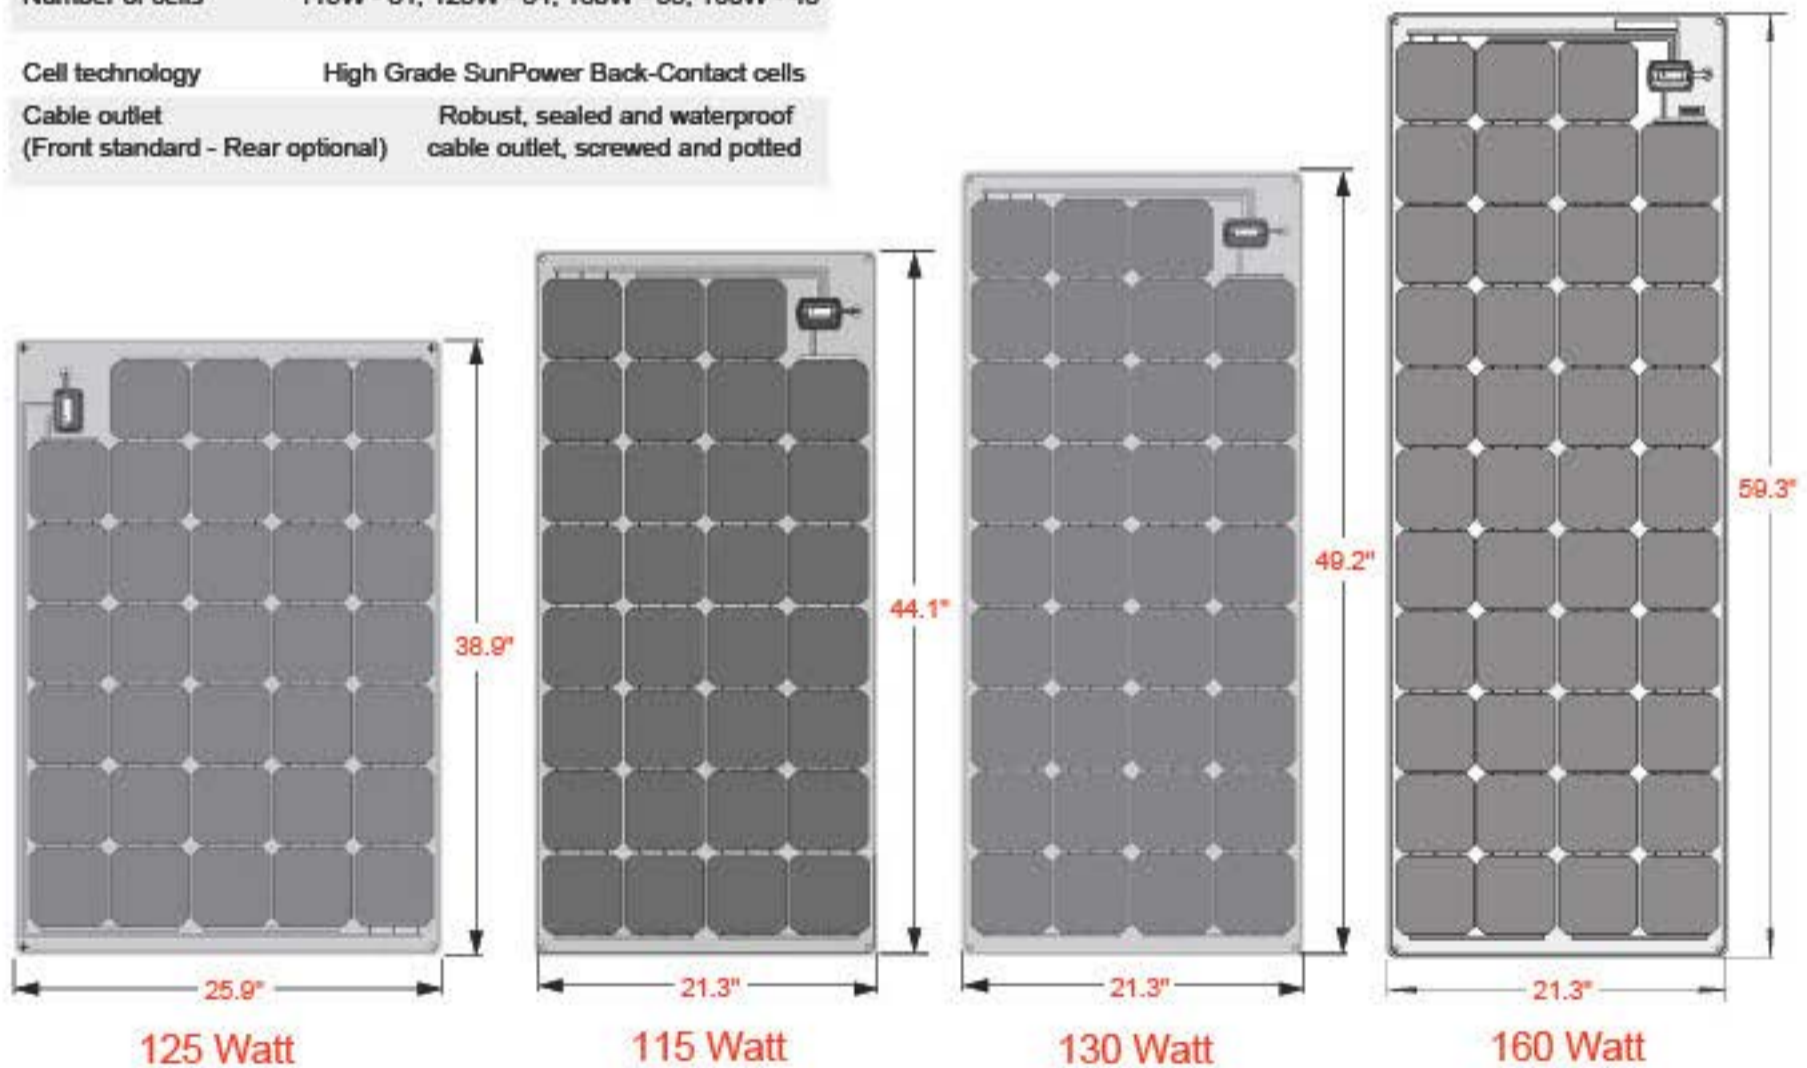

Coastal Climate Control, Inc.
www.CoastalClimateControl.com - info@CoastalClimateControl.com
 301-352-5738 - Annapolis MD USA